


MPF 3

Electro pneumatic copy router with horizontal head with 3 milling bits: n° 2 bits of \varnothing 10 mm and n° 1 bit of \varnothing 12 mm

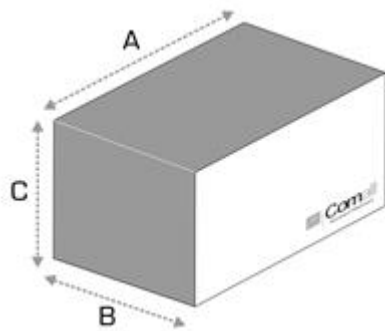

A (mm)	B (mm)	C (mm)	Kg
1800 700	720	1600	130

Technical data:

- Three phase motor 1,1 kW - 230/400V 50/60Hz; 2.800 rpm 50 Hz / 3.300 rpm 60 Hz
- Spindle speed 12.000 rpm
- Milling capacity: X=300 mm Y=150 mm Z=130 mm
- Working pressure: 7 bar
- 2 manual tracer pointers
- Centring device
- N° 1 milling bit (\varnothing 8 mm)
- Collet \varnothing 8 mm
- Manual lubrication
- Spray mist blade lubrication system
- No. 2 horizontal pneumatic vices
- Safety valves for clamps
- Double working pressure servo-controlled in low pressure
- Service spanners

Specifications of the 3 spindle drilling unit

- 2 bits \varnothing 10 tang 10
- 1 bit \varnothing 12 tang 10
- Three-phase motor, 4 poles 1.1 kW 230/400V – 50 Hz

Optionals:

- Single phase motor